
CLASSIFICATION OF REACTION TO FIRE ACCORDANCE WITH EN 13501-1:2018

1. Introduction

This classification report defines the classification assigned to UltraProtectionLaminate in accordance with the procedures in EN 13501-1:2018.

Sponsor: Continental Grafix AG
Lettenstrasse 2
6343 Rotkreuz, Switzerland

Prepared by: SYCHTA LABORATORIUM Sp. J.
Laboratorium Badań Palności Materiałów
ul. Ofiar Stutthofu 90
72-010 Police, Poland

Notified Body No: 3039

Product name: UltraProtectionLaminate

Classification report No: SL/Z-151/EN13501/0181a/2026

Date of issue: 24.02.2026

This classification report consists of four pages and may only be used or reproduced in its entirety.

2. Details of classified product

2.1. General

The product, UltraProtectionLaminate

2.2. Product description

The product, UltraProtectionLaminate, is described below or is described in the reports provided in support of classification listed in 3.1

Colourless self-adhesive film with a rough texture (0,36-0,40 mm thick), on the carrier paper (0,14-0,17 mm thick), total thickness of 0,50-0,57 mm, total weight per unit area approx. 355-365 g/m² (with carrier paper) and weight per unit area approx. 220 g/m² (only film).

3. Reports and results in support of this classification

3.1. Specific conditions

-

3.2. Reports

Name of Laboratory	Name of sponsor	Report ref. No.	Test method and date Field of application rules and date
Sychta Laboratorium	Continental Grafix AG	SL/Z-151/EN9239/0180a/2026	EN ISO 9239-1 EN ISO 11925-2 17.02 and 23-24.02.2026

3.3. Results

Test method and test numer	Parameter	No. Tests ^a	Results	
			Continuous parameter - mean (m)	Compliance with parameters
EN ISO 9239-1	CHF, kW·m ⁻²	3	>11	(-)
	Smoke Sc, %·min		1	(-)
EN ISO 11925-2 Exposure time 15 s	Flame spread ≤ 150 mm in 20 s, mm	12	(-)	Compliant

^a Not for extended application, (-): not applicable

4. Classification and field of application

4.1. Reference of classification

This classification has been carried out in accordance with EN 13501-1:2018.

4.2. Classification

The product, UltraProtectionLaminate, in relations to its reaction to fire behaviour is classified:

B_{fl}

The additional classification in relations to smoke production is:

s1

The format of the reaction to fire classification for floorings products is:

Fire behaviour		Smoke production	
B_{fl}	-	s	1

Reaction to fire classification: B_{fl}-s1

4.3. Field of application

This classification is valid for the following product parameters:

- PET Textured Clear Film
- Thickness: 600 $\mu\text{m} \pm 20 \mu\text{m}$

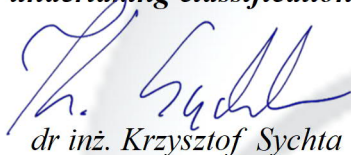
The classification is valid for the following end use applications:

This classification applies to material bonded on mineral substrates of class A1_{fl} or A2_{fl-s1}.

5. Limitations

This classification document does not represent type approval or certification of the product.

**Signature of person
undertaking classification:**


dr inż. Krzysztof Sychta

**Signature of person
authorising report:**


dr hab. inż. Zygmunt Sychta

SYCHTA LABORATORIUM Sp. J.
72-010 Police, ul. Ofiar Stutthofu 90
tel./fax +48 91 4210 214, tel. 502078855
e-mail: biuro@sychta.eu www:sychta.eu
KRS 0000387681 REGON 321023120
NIP 8513152392